
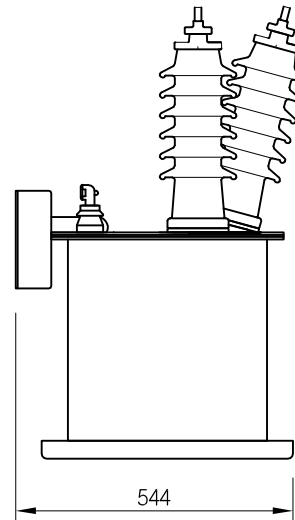



SPECIFICATION	
TYPE	SNM - 1
PHASE	3P / 4W
ACCURACY CLASS	0.5W
RATED FREQUENCY	60 HZ
INSULATION LEVEL	50/150KV BIL
RATED BURDEN	3X25VA
RATED PRIMARY VOLTAGE	22900V/√3
RATED SECONDARY VOLTAGE	190V/√3
RATED PRIMARY CURRENT	5 ~ 300A
RATED SECONDARY CURRENT	5A
OVER CURRENT FACTOR	5/5A ~ 15/5A 150IN
	20/5A ~ 50/5A 75IN
	60/5A ~ 300/5A 40~75IN
OIL QUANTITY	50L
TOTAL WEIGHT	150kg
STANDARD	KSC - 1707
TOLERANCE	± 10%

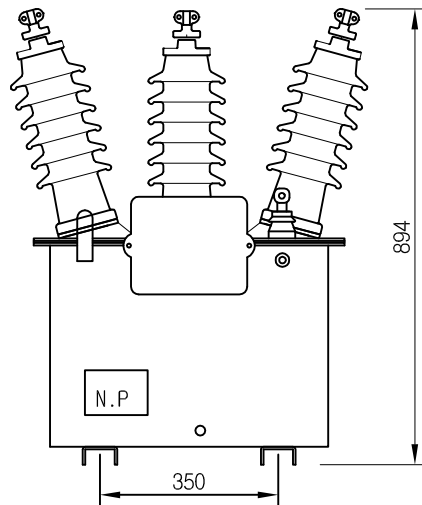

No	CONTENS	DATE	REV'DBY	CHECKED	APPROVAL	SAMNUNG CO., LTD				Q'TY	TITEL	M.O.F - 외 함	
1							SAMNUNG CO., LTD					NAME	외 함 도
2												METERIAL	
3											DATE	SCALE	UNIT
4						2013.05.22		mm	s.j.w	s.h.k	L.H.C	SMO - 0 - 0000	